

## CBS ID-TAB™ ADHESIVE-FREE FLOORING INSTALLATION SYSTEM



### PRODUCT DESCRIPTION

With 100% solid acrylic adhesive one side attached to a thin carrier film, CBS ID-Tab cleanly floats carpet tiles, +4mm Luxury Vinyl Tiles (LVT), and woven vinyl tiles by attaching each tile to the next at the intersection of the tile.

The ID-Tab is used when wanting to protect high value and precious subfloors including:

- Marble, wood, mosaic etc
- Temporary overlay solution needed for the short term
- Floors in heritage and preservation sites

#### **1-Dimensional Hold:**

The tiles are held together horizontally as per conventional floating floor solutions, and because the adhesive is only one side the subfloor can be completely protected from any contamination.

#### **Proven technology:**

Our adhesive technology has been tried and tested over many years and is the same as that used in IOBAC MagTabs® and Tab-it® products. The carrier film provides a thin and stable base carrier layer.

#### **Clean Removal:**

Floor tiles can be removed cleanly and easily for reuse or recycling, with the base left contamination-free and ready for the next flooring installation straight away.

#### **VOC Emissions Testing**

EN16516 tests construction products for emissions into indoor air of regulated dangerous substances such as VOCs, very volatile aldehydes.

Independent testing has confirmed that MagTabs comply with the "Exemplary" criteria on VOC emissions for BREEAM and exceeded all points for LEED specification. The ID-Tab uses the same adhesive as IOBAC MagTabs.



#### **Storage and Disposal**

Resistant to extremes of moisture and temperature.  
Constant working temperature of -30 to +60°C.  
ID-Tabs can be down-cycled or reused.




**CBS ID-TAB™  
ADHESIVE-FREE FLOORING INSTALLATION SYSTEM**



**PRODUCT COMPOSITION**

Adhesive based tabs consisting of 2 layers, kiss-cut onto a filmic release liner

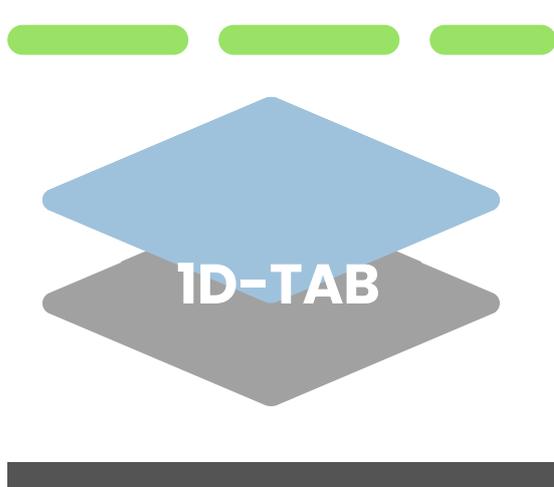

**FLOOR COVERING:**

**Carpet tile, +4mm Luxury Vinyl Tile (LVT) or woven vinyl tile**

**ADHESIVE FILM LAYER**

- Acrylic based adhesive with polyester film liner
- Odourless 100% solid material

**CARRIER FILM**

- Flexible carrier film

**RECEPTIVE SUB-FLOOR**

All common sub-floors, in particular those needing protection from contamination.

**DIMENSIONS AND PACKAGING**

**CBS ID-Tab Dimensions:**

- Each Tab is 100 x 100 mm
- 0.3mm thickness

**Packaging:**

- 100 Tabs per roll
- 30 rolls per case
- = 3,000 Tabs per case

**Case dimensions:**

- 354 x 354 x 354mm
- 16kg weight

**INSTALLATION GUIDELINES**

Preparation: Ensure sub-floor is clean, dry and free from loose particles.

For full instructions, please refer to CBS ID-Tab Installation guidance at [www.circularbuildingsolutions.co.uk](http://www.circularbuildingsolutions.co.uk)

*Manufactured by Circular Building Solutions Ltd,  
The Old Coach House, 83a, Victoria Road, Farnborough,  
Hampshire, England, GU14 7PP*

*Email: [info@circularbuildingsolutions.co.uk](mailto:info@circularbuildingsolutions.co.uk)  
Telephone: +44 (0)7703 132494*

