

## IOBAC TAB-IT® FLOORING INSTALLATION SYSTEM SUPPORTING RE-USE

### TECHNICAL DATASHEET

#### PRODUCT DESCRIPTION

Ultra thin, double-sided dry-tack tabs, IOBAC Tab-It cleanly and securely affixes carpet tiles, +4mm Luxury Vinyl Tiles (LVT), and woven vinyl tiles onto most common prepared sub-floors, including:

- non-metal raised access floors including calcium sulphate, aluminium and wood
- concrete/polished concrete
- wood
- ceramic
- vinyl/lino/VCT

#### Ultra Thin, Yet Super Strong:

Using the same proven dry-tack chemistry as IOBAC MagTabs®, Tab-It securely holds floor coverings in place with amazing grab force. Super strong, tear resistant material.

Extremely thin profile means no transference through to the flooring top surface.

#### Clean Removal for Easy Flooring Reuse:

Floor tiles are uplifted cleanly and easily for reuse or recycling via flooring manufacturers' take-back schemes.

The sub-floor is left contamination-free and ready for the next flooring installation straight away. Minimal work is needed to restore the sub-floor for the next install.

#### PRODUCT PERFORMANCE

- Highly shear resistant
- Good resistance to extremes of moisture and temperature, and ageing
- Chemical resistant
- Working temperature of +15 to +40°C
- Store between +10°C and +20°C



#### For Use in Common Built Environments

Fast, clean dry-laid installation process suitable for most common sub-floors.

Eliminates messy wet trades and VOC's associated with adhesive-based methods.




## IOBAC TAB-IT® FLOORING INSTALLATION SYSTEM SUPPORTING RE-USE

### TECHNICAL DATASHEET

#### PRODUCT COMPOSITION

Ultra thin, double-sided dry-tack tabs, double-lined for ease of installation

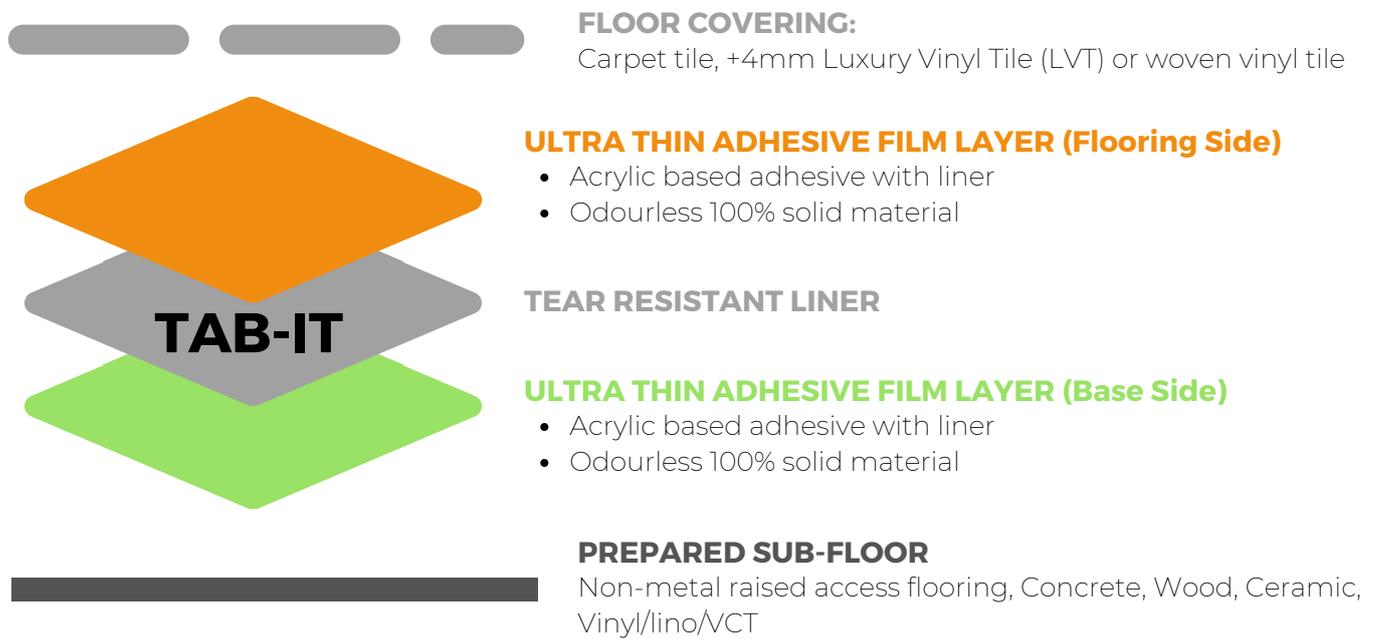

#### DIMENSIONS AND PACKAGING

**Tab-It Dimensions:**

- Each Tab-It is 97 x 97 mm
- ~ 0.1mm thickness

**Packaging:**

- 100 x Tab-It per roll
- 27 rolls per case
- = 2,700 x Tab-It per case

**Case dimensions:**

- 354 x 354 x 354 mm
- circa 13.5kg weight

#### INSTALLATION GUIDELINES

Preparation: Ensure sub-floor is clean, dry and free from loose particles which may impair grab. If the subfloor has excessive laitance or dust, it may require a suitable primer or sealant prior to using Tab-It. For full instructions, please refer to [IOBAC Tab-It Installation guidance](#).

Manufactured by Circular Building Solutions Ltd,  
The Old Coach House, 83a, Victoria Road, Farnborough,  
Hampshire, England, GU14 7PP

Email: [info@circularbuildingsolutions.co.uk](mailto:info@circularbuildingsolutions.co.uk)  
Telephone: +44 (0)7703 132494