

CBS LE-TAB™ ADHESIVE-FREE FLOORING INSTALLATION SYSTEM



PRODUCT DESCRIPTION

CBS LE-Tab™ is ideal for adhesive-free installation of lower energy backed carpet tiles, +4mm Luxury Vinyl Tiles (LVT), and woven vinyl tiles.

It has high-tack acrylic adhesive attached to a thin carrier film on one side, and a lower tack removable film for releasable attachment to the subfloor on the other.

The LE-Tab attaches to the subfloor via a releasable film that holds horizontally but allows vertical removal from subfloors including:

- Marble, wood, mosaic, concrete, plywood and chipboard
- Temporary overlay solution needed for the short term

2 Dimensional Hold:

The tiles are held together horizontally and held to the subfloor with the weaker releasable film. The LE-Tab will grab to the lower energy backing of the newer, more sustainable floor backings and will protect the subfloor from any contamination.

Proven technology:

Our adhesive technology has been tried and tested over many years and is the same as that used in IOBAC MagTabs® and Tab-it® products. It has been approved by many global floor covering manufacturers.

Clean Removal:

Floor tiles can be removed cleanly and easily for reuse or recycling, with the base left contamination-free and ready for the next flooring installation straight away.


VOC Emissions Testing

EN16516 tests construction products for emissions into indoor air of regulated dangerous substances such as VOCs, very volatile aldehydes.

LE-Tab incorporates ECiPlus film, which is very low emission rated.

Storage and Disposal

Resistant to extremes of moisture and temperature.
Constant working temperature of -30 to +60°C.
Depending on install conditions, LE-Tab may be able to be down-cycled or reused.

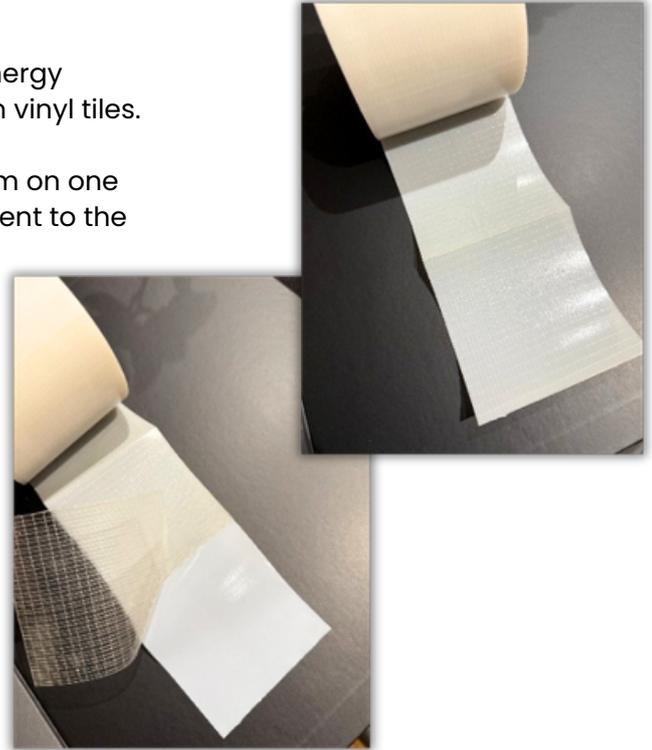


CBS LE-TAB™ ADHESIVE-FREE FLOORING INSTALLATION SYSTEM



PRODUCT COMPOSITION

Adhesive based tabs consisting of 3 layers, kiss-cut onto a filmic release liner

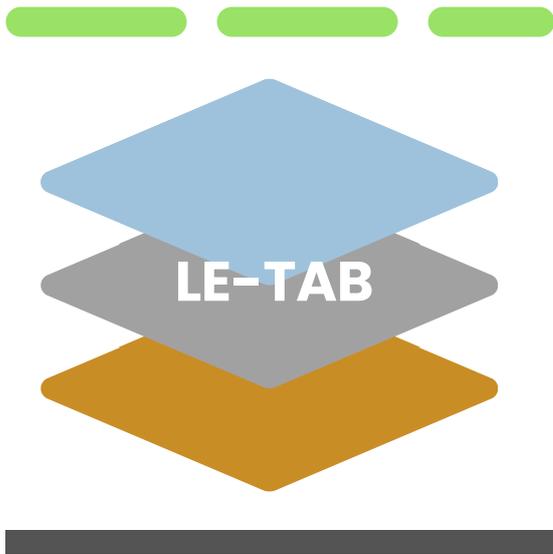

FLOOR COVERING:

Carpet tile, +4mm Luxury Vinyl Tile (LVT) or woven vinyl tile

ECIPLUS ADHESIVE LAYER

- High-Tack adhesive layer to bond to tile

CARRIER FILM LAYER

- High Gloss carrier film layer

ULTRA-THIN LOW TACK RELEASABLE LAYER

- Low tack releasable film

RECEPTIVE SUB-FLOOR

All common sub-floors, in particular those needing protection from contamination.

DIMENSIONS AND PACKAGING

CBS LE-Tab Dimensions:

- Each Tab is 100 x 100 mm
- 0.35mm thickness

Packaging:

- 100 Tabs per roll
- 30 rolls per case
- = 3,000 Tabs per case

Case dimensions:

- 354 x 354 x 354mm
- 16kg weight

INSTALLATION GUIDELINES

Preparation: Ensure sub-floor is clean, dry and free from loose particles.

For full instructions, please refer to CBS LE-Tab Installation guidance at www.circularbuildingsolutions.co.uk

*Manufactured by Circular Building Solutions Ltd,
The Old Coach House, 83a, Victoria Road, Farnborough,
Hampshire, England, GU14 7PP*

*Email: info@circularbuildingsolutions.co.uk
Telephone: +44 (0)7703 132494*